



**Roca**

**Calacata Gold**



# Calacata Gold

The Calacata Gold generates unique atmospheres and bright spaces offering a balance between the matte and polished finishes. Also adding warmth through its gold veining, making way for versatile combinations of elements.



Calacata Gold 24"x48" UP, 12"x24" R PO, 6"x18" Wall & 13"x13" Mosaic.


### Matte & Polished Porcelain + Ceramic Wall

- 24"x48 R PO - 24"x48 R UP - 12"x24" R PO - 12"x24" UP - 6"x18" Wall




# Calacata Gold

Matte & Polished Porcelain



24"x48" R 60x120 cm    12"x24" R 30x60 cm    12"x24" 31x61 cm    6"x18" 15x45 cm

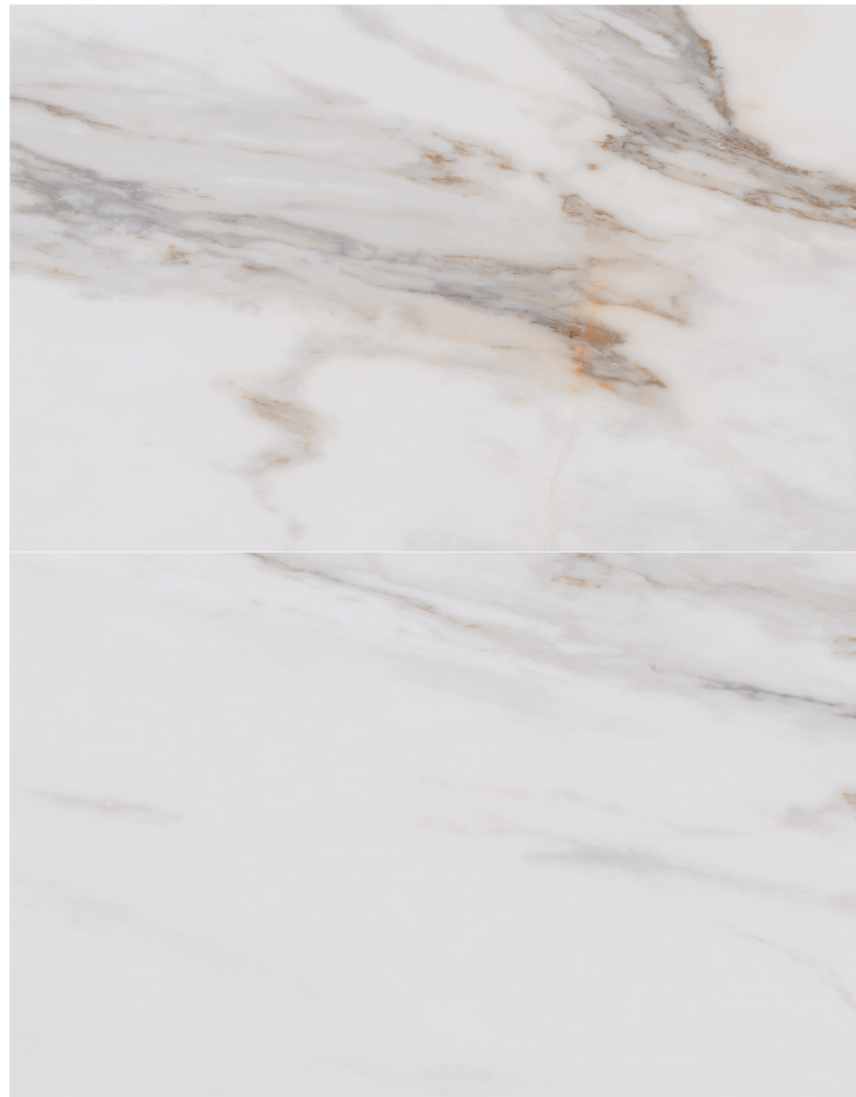

## Gold



24"x48" R PO  
FCGPET3171



24"x48" R UP  
FCGPPT3171



12"x24" R PO  
FCGPER5171



12"x24" UP  
FCGPPR5171



6"x18" Wall  
FCGRVW2171



13"x13" Mosaic  
FCGPPR8171



6"x18" Bullnose  
FCGRV04171



3"x12" Bullnose  
FCGPP64171

## Technical Specifications - Wall

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

## Technical Specifications - Floor

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Matte	Polished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	5	3
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	4	3
Deep Abrasion - Unglazed Tiles	C1043	Pass	Pass
PEI- Glazed Tiles***	C1027	4	3
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	<=0.40
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

## Packaging Info

Size	SF per carton	PC per carton
12"x24" R PO	18.84	10
12"x24" UP	20.34	10
24"x48" R	15.28	2
13"x13" Mosaic	13.13	11
3"x12" Bullnose	5.92	24
6"x18" Wall	11.95	16
6"x18" Bullnose	11.95	16